

Read instructions and view illustrations before beginning.

Need help with your installation?

✉ sales@superatv.com 💻 www.superatv.com

☎ 1-812-574-7777 🕒 8:00am - 9:00pm EST M-Th
 8:00am - 7:00pm EST Friday
 9:00am - 2:00pm EST Saturday

Liability Statement
 SuperATV's[®] products are designed to best fit user's ATV/UTV under stock conditions. Adding, modifying, or fabricating any factory or aftermarket parts will void any warranty provided by SuperATV[®] and is not recommended. SuperATV's[®] products could interfere with other aftermarket accessories. If user has aftermarket products on machine, contact SuperATV[®] to verify that they will work together.

Although SuperATV[®] has thousands of satisfied customers, user should be aware that installing lift kits, long travel, or suspension kits, tires, etc. will change the ride of machine and may increase maintenance and part wear. Operating any off-road machine while, or after, consuming alcohol and/or drugs increases risk of bodily harm or death. No warranty or representation is made as to this product's ability to protect user from severe injury or death. SuperATV[®] urges operators and occupants to wear a helmet and appropriate riding gear at all times.

By purchasing and installing SuperATV[®] products, user agrees that should damages occur, SuperATV[®] will not be held responsible for loss of time, use, labor fees, replacement parts, or freight charges. SuperATV[®], nor any 3rd party, will not be held responsible for any direct, indirect, incidental, special, or consequential damages that result from any product purchased from SuperATV[®]. The total liability of seller to user for all damages, losses, and causes of action, if any, shall not exceed the total purchase price paid for the product that gave rise to the claim.


SuperATV[®] will warranty only parts provided by SuperATV[®]. Any damage or problems with OEM housings, bearings, seals, or other manufacturers' products will not be covered by SuperATV[®]. SuperATV[®] parts and products are not warranted if item was not installed properly, misused, or modified.

Thank You
For Choosing
SUPERATV.COM[®]


2017 model only: *passenger side shown.*

- Remove pre-installed Pivot Tubes and Bushings.
- Install new Pivot Tubes and Bushings as shown.

See page 5 when installing to machine.

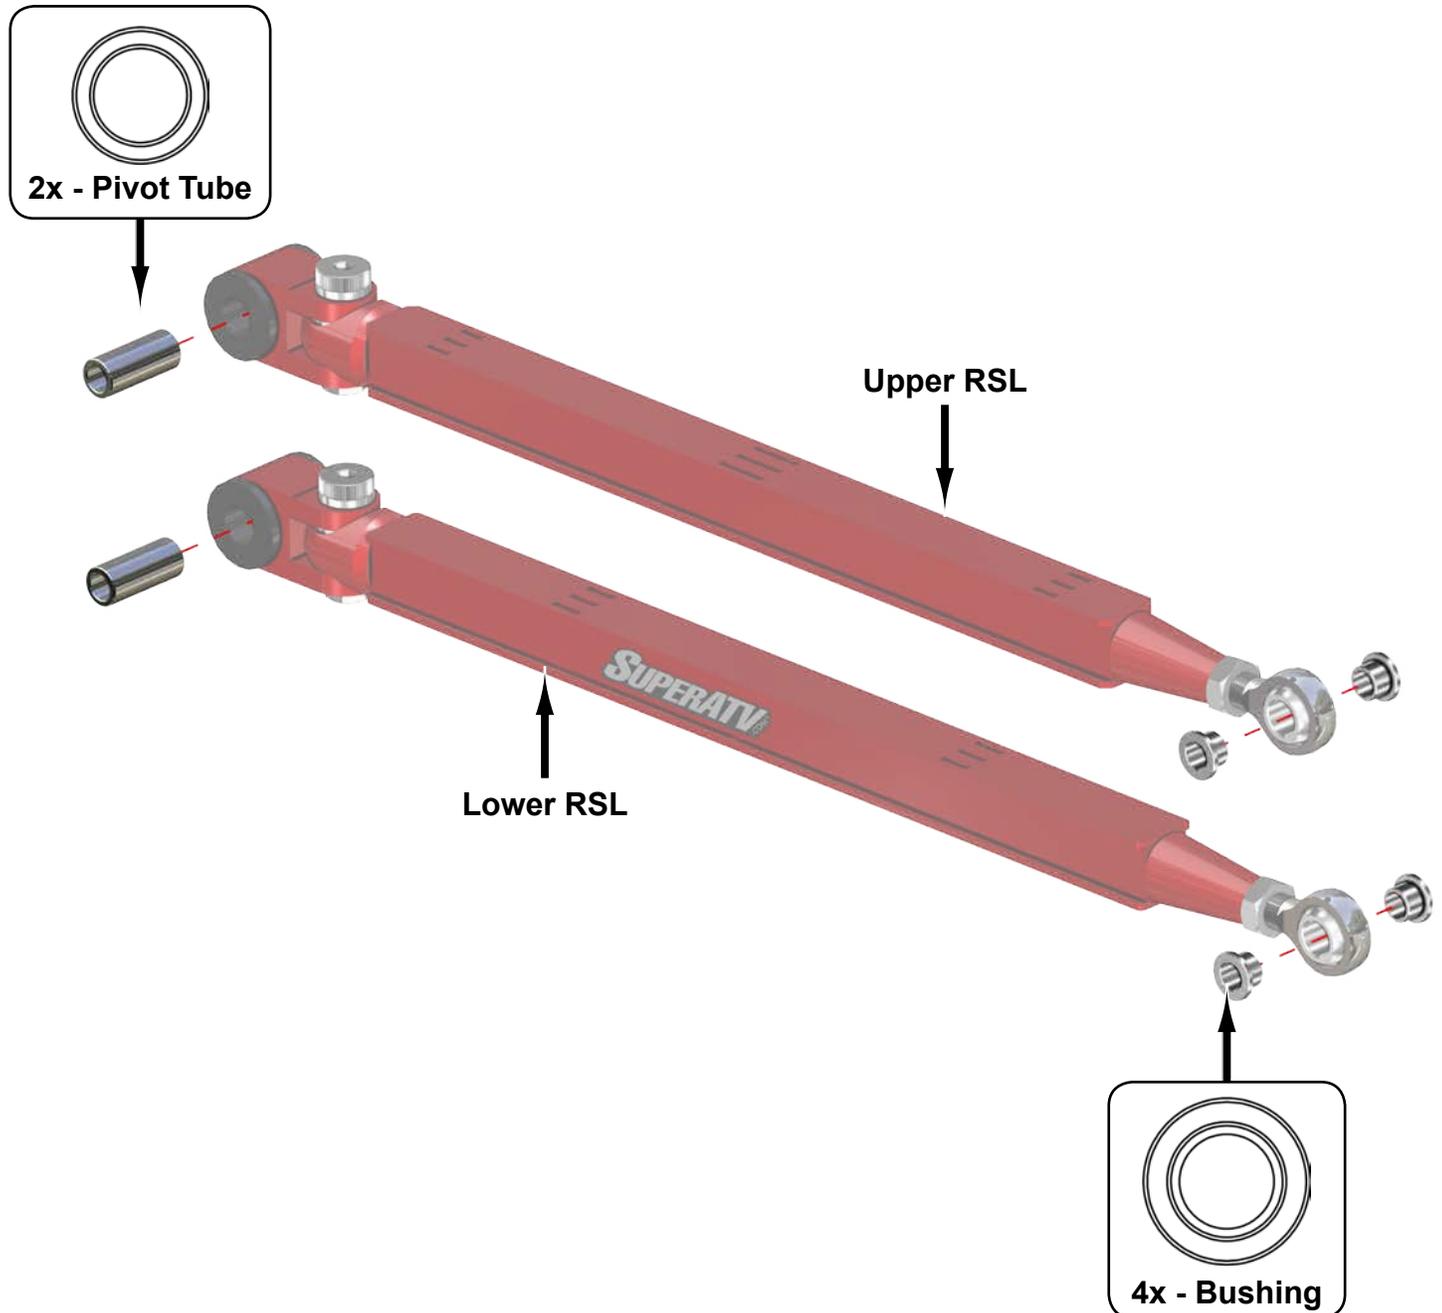


Keep all stock hardware removed from machine.

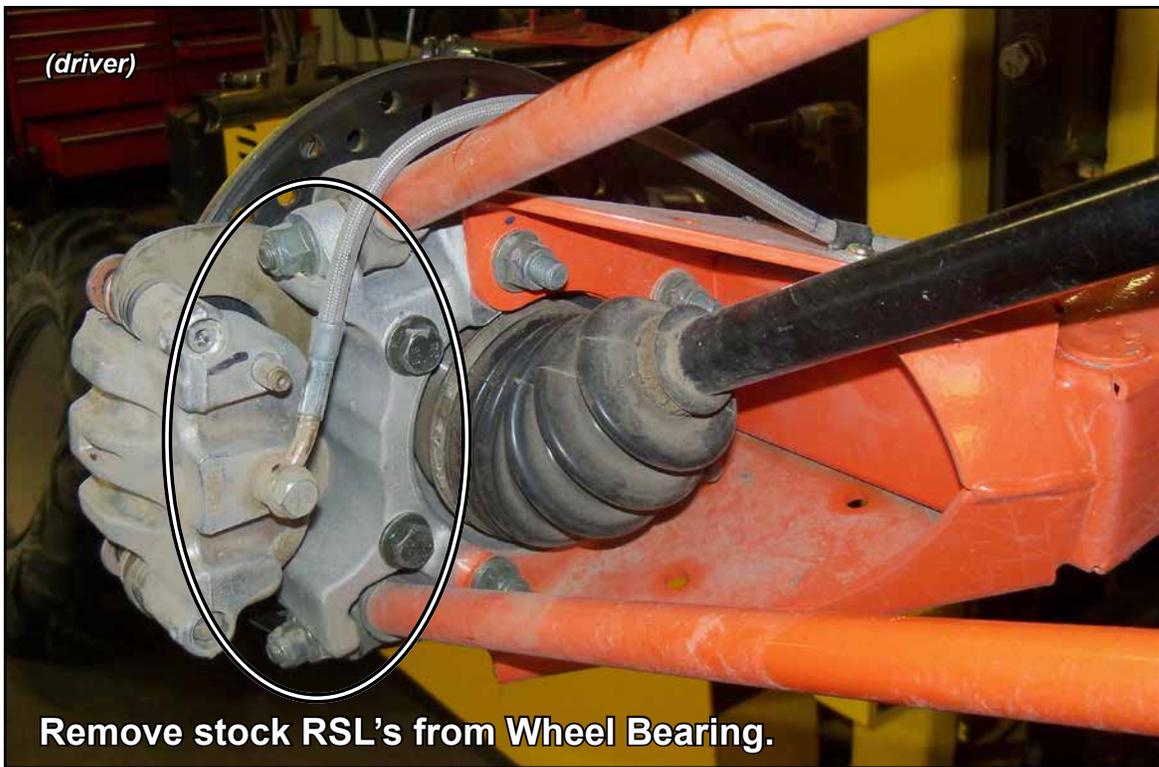

Install Option A: SuperATV p/n RB-P-RZR1K Rear Bumper installed

- Use stock hardware when securing Radius Arms to Frame.

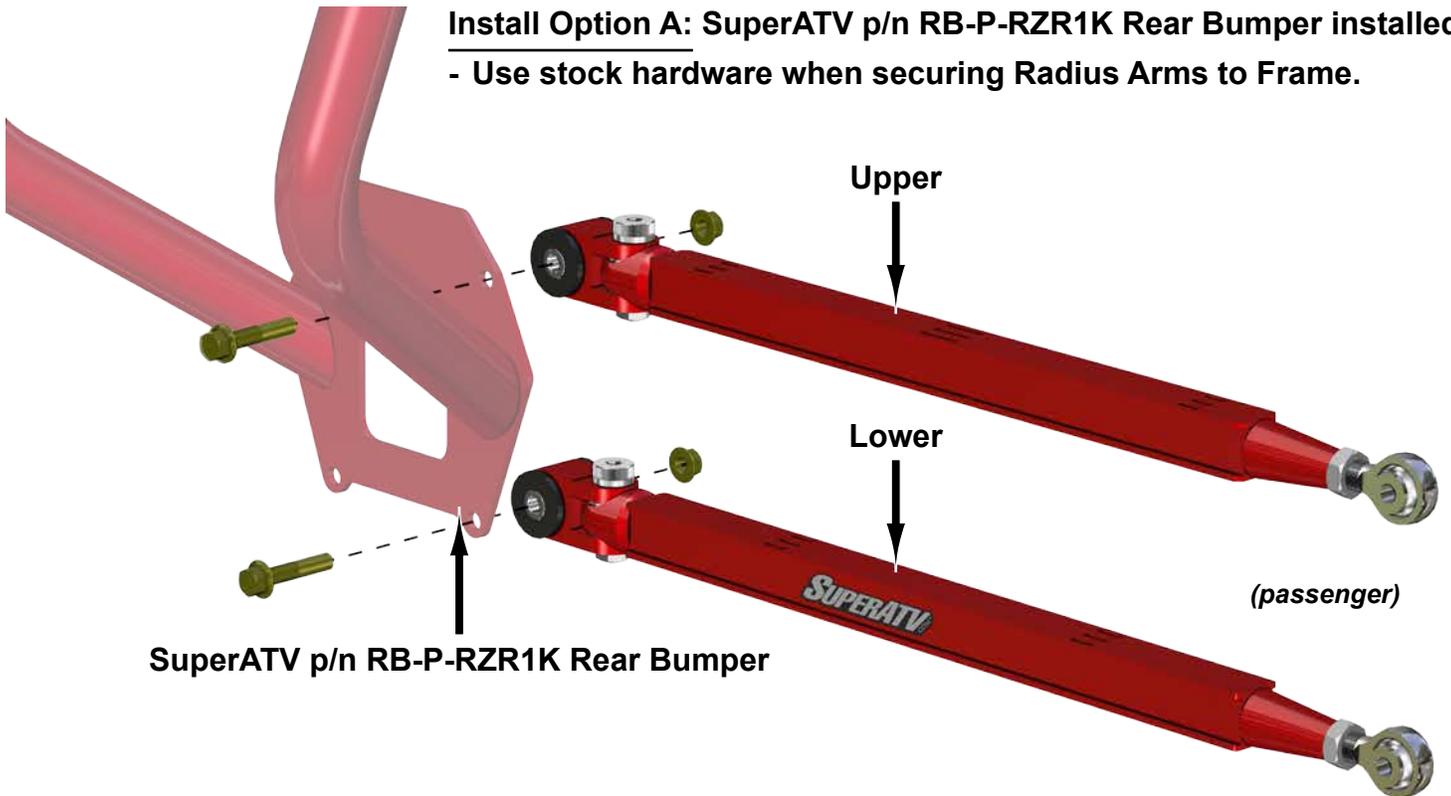


SuperATV p/n RB-P-RZR1K Rear Bumper

Install Option B: No Bumper installed

**- Use hardware shown when securing Radius Arms and Brace Plate to Frame.
- Spacers will install into lowest holes and against Frame.**



M10 x 80mm

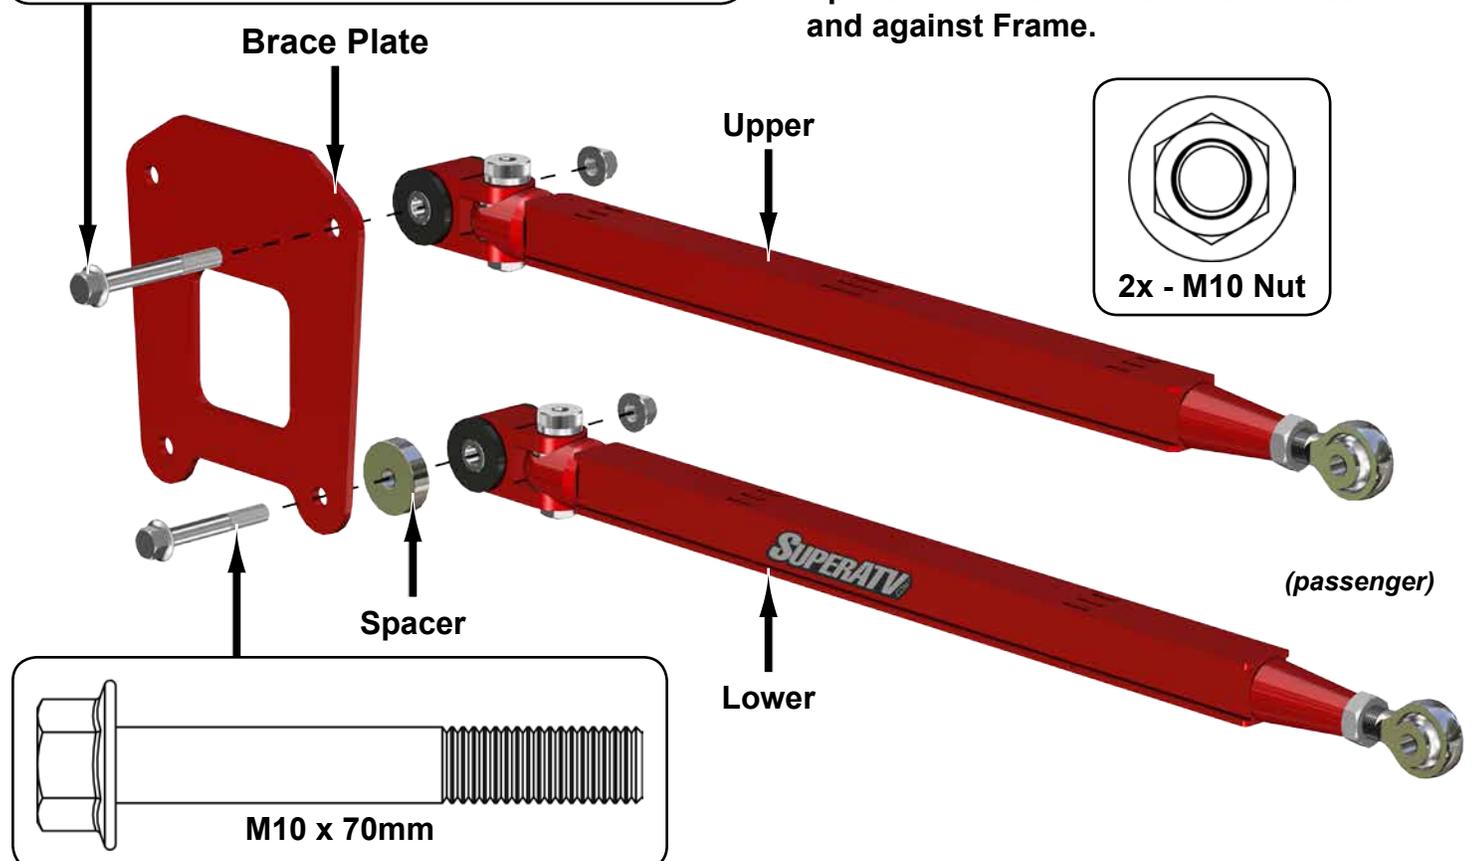

Brace Plate

Upper

2x - M10 Nut


Spacer

Lower


M10 x 70mm

2017 model installation: *passenger side shown.*

- Use Brace Plate, M12 hardware, and Spacer shown when securing.
- Repeat for opposite side. Tighten hardware completely.

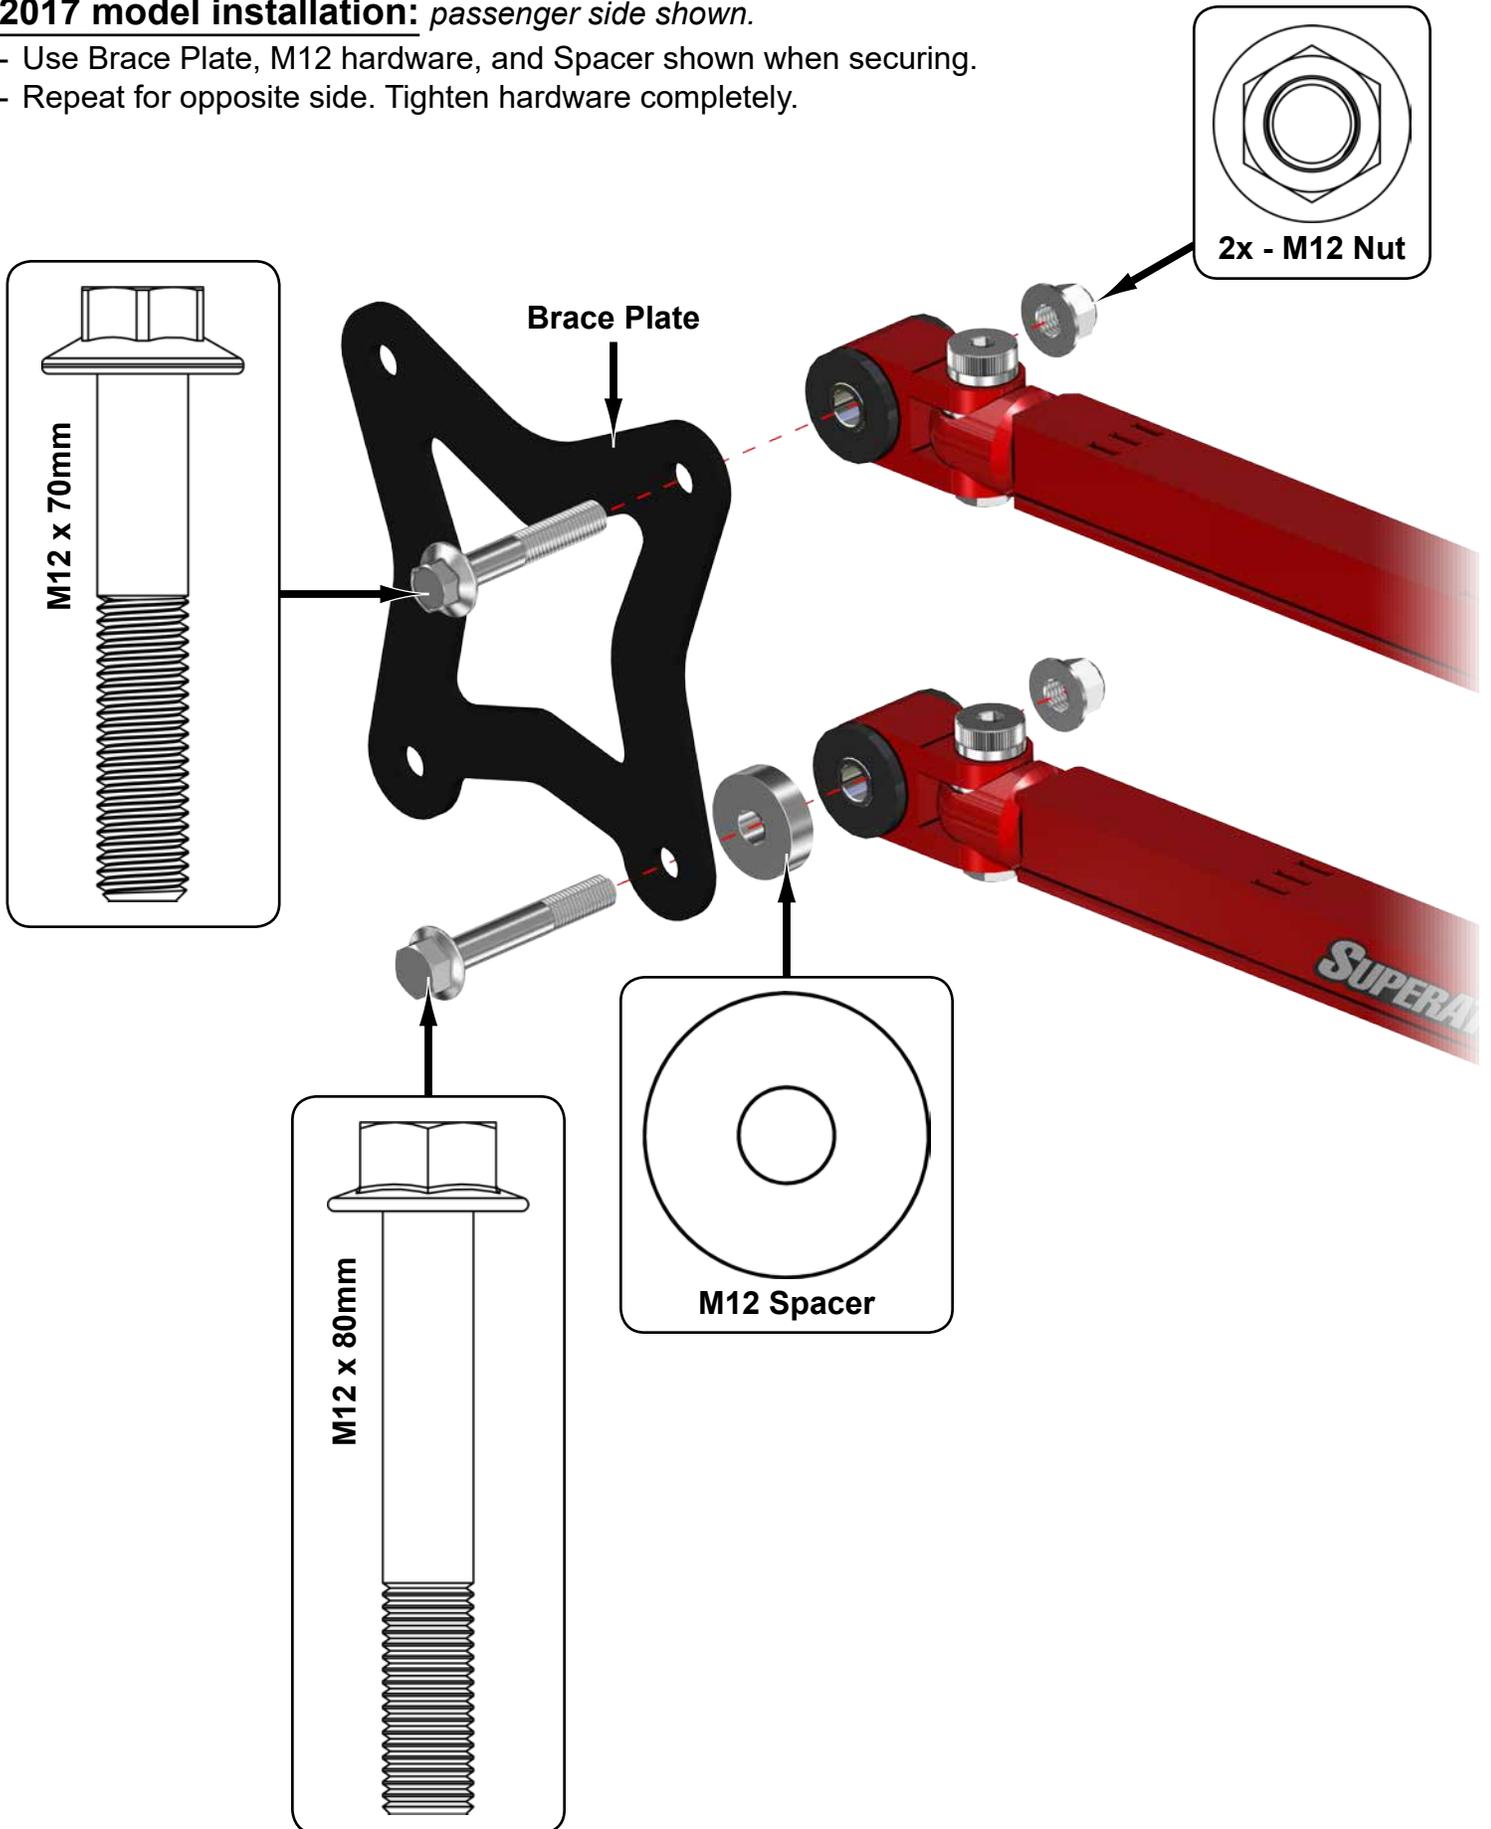

- Secure to Wheel Bearings with stock hardware.

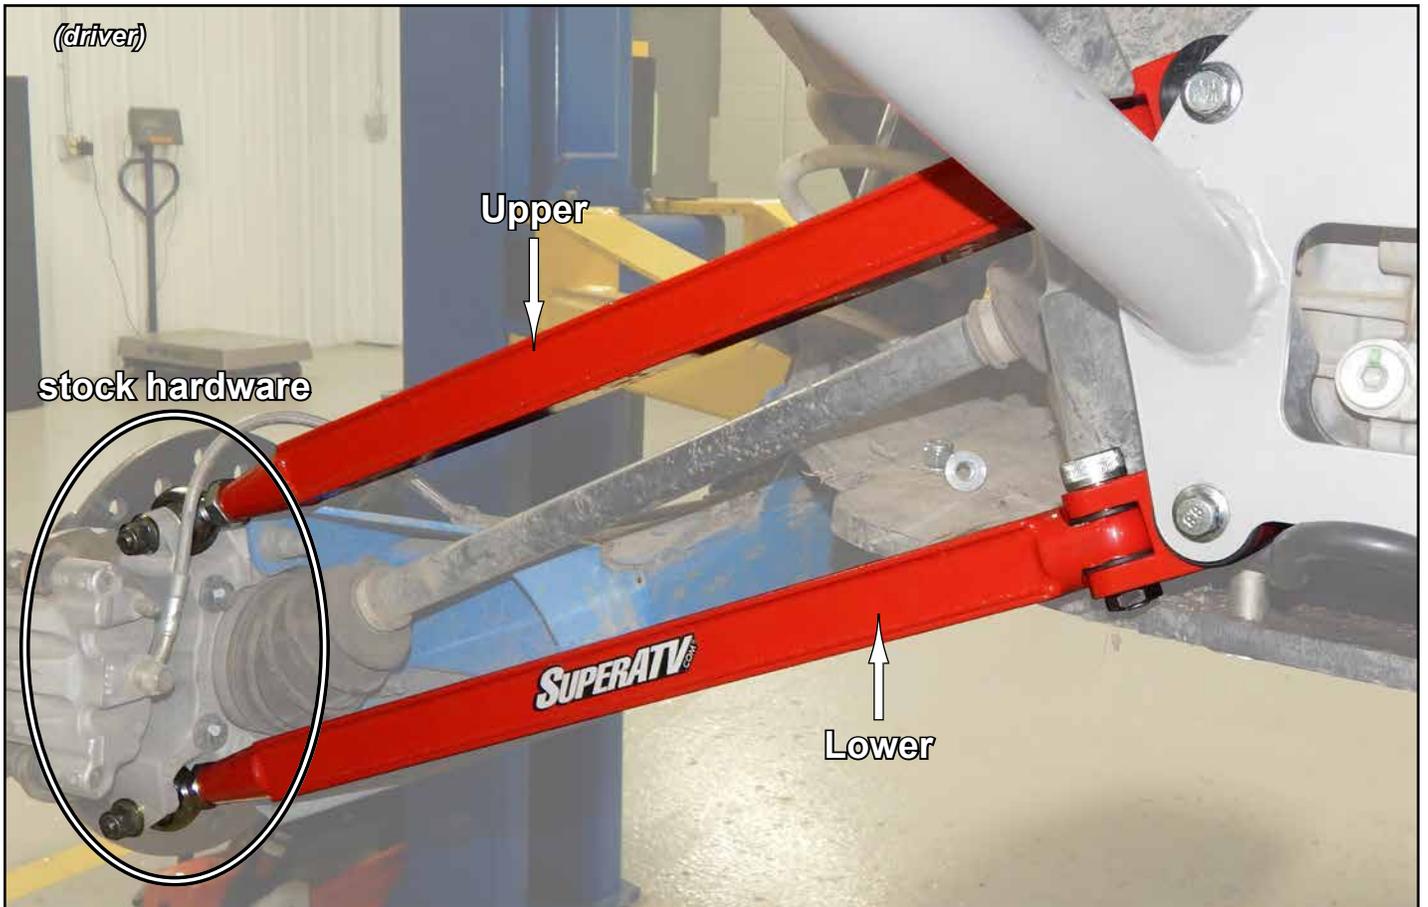

Radius Arms Adjustment:

- If Wheels and Axles do not rotate freely, equally adjust Radius Arms "out" in small increments.
- Tighten hardware completely.